

Flow regulator
2 way, pressure compensated
with check valve for free reverse flow

VRFC2-VU

0M.24.03 - X - Y

RE 18309-36

Edition: 03.2016

Replaces: 04.2010



Technical data






Operating pressure	up to 210 bar (3000 psi)
Q= max. inlet flow "E" port (see "Dimensions")	
Flow range adjustment	0 - 3 turns
Weight	see "Dimensions"
Manifold material	Aluminium
Note: aluminium bodies are often strong enough for operating pressures exceeding 210 bar (3000 psi), depending from the fatigue life expected in the specific application. If in doubt, consult our Service Network.	
Fluid	Mineral oil (HL, HLP) according DIN 51524
Fluid temperature range	-30 °C to 100 (-22 to 212 °F)
Viscosity range	5 to 800 mm ² /s (cSt)
Recommended degree of fluid contamination	Class 19/17/14 according to ISO 4406
Other technical data	see data sheet 18350-50

Note: for applications outside these parameters, please consult us.

Description

A constant flow rate, regardless of system pressures, is established from E to R, while a minimum pressure differential of approximately 5 bar (70 psi) exists between the two ports. Output flow can be varied from zero (closed) to the nominal maximum rating. Free flow is permitted from R to E, regardless of valve adjustment, when pressure overcomes the spring bias of the check valve.

Characteristic curve

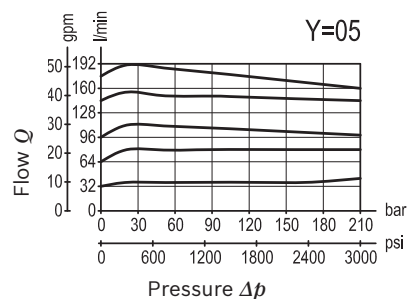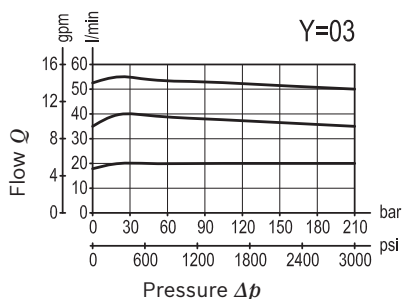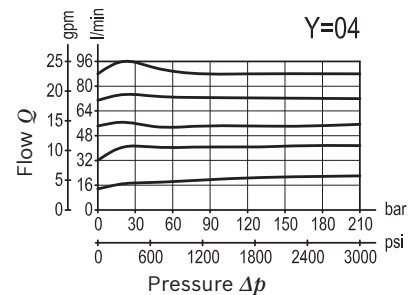

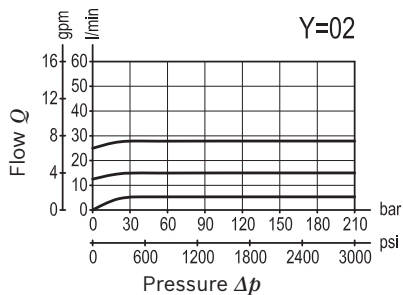


Ordering code

0M.24.03	X	Y
-----------------	----------	----------

Flow regulator
2 way, pressure compensated
with check valve for free reverse flow

Adjustments

70	Handknob and locknut	
80	Screw and locknut	
40	Graduated handknob	


Port sizes	E - R
02	G 3/8
03	G 1/2
04	G 3/4
05	G 1

Preferred types

Type	Material number
0M2403700200000	R930004201
0M2403700300000	R930004202
0M2403700400000	R930004203
0M2403700500000	R930004204
0M2403800200000	R930000267
0M2403800300000	R930004205

Type	Material number
0M2403800400000	R930000221
0M2403800500000	R930000256
0M2403400200000	R930004200
0M2403400300000	R930000524
0M2403400400000	R930000525
0M2403400500000	R930000274

Dimensions

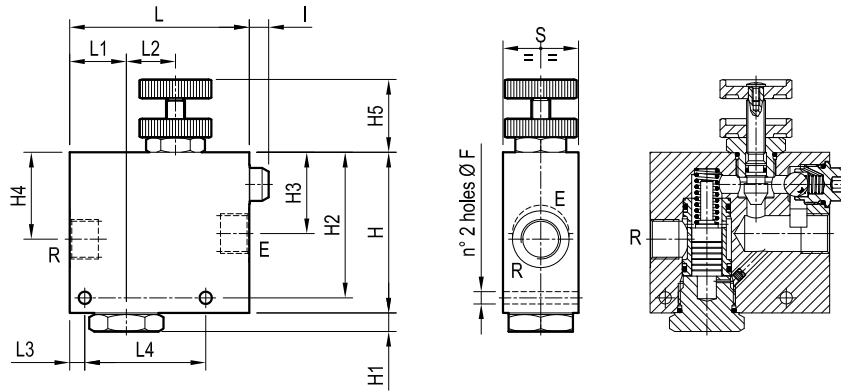

50 (1.97)	82 (3.23)	8 (0.32)	40 (1.58)	40 (1.58)	145 (5.71)	13 (0.51)	40 (1.58)	64 (2.52)	66 (2.6)	100 (3.94)	10 (0.39)	110 (4.33)	8.5 (0.34)	190 l/min 50 gpm	G 1	3.1 (6.8)
50 (1.97)	82 (3.23)	8 (0.32)	40 (1.58)	35 (1.38)	130 (5.12)	13 (0.51)	40 (1.58)	56 (2.21)	54 (2.13)	90 (3.54)	10 (0.39)	100 (3.94)	8.5 (0.34)	90 l/min 24 gpm	G 3/4	2.1 (4.6)
40 (1.58)	64 (2.52)	8 (0.32)	26 (1.02)	30 (1.18)	95 (3.74)	10 (0.39)	40 (1.58)	46 (1.81)	42 (1.65)	77 (3.03)	10 (0.39)	85 (3.35)	6.5 (0.26)	55 l/min 15 gpm	G 1/2	1.04 (2.3)
40 (1.58)	64 (2.52)	8 (0.32)	26 (1.02)	30 (1.18)	95 (3.74)	10 (0.39)	40 (1.58)	46 (1.81)	41.5 (1.63)	77 (3.03)	10 (0.39)	85 (3.35)	6.5 (0.26)	30 l/min 8 gpm	G 3/8	1.04 (2.3)
S	L4	L3	L2	L1	L	I	H5	H4	H3	H2	H1	H	F	Q	Y	Weight kg (lbs)

Bosch Rexroth Oil Control S.p.A.

Via Leonardo da Vinci 5
P.O. Box no. 5
41015 Nonantola – Modena, Italy
Tel. +39 059 887 611
Fax +39 059 547 848
compact-hydraulics-pib@boschrexroth.com
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging. Subject to change.