


Compact power modules DL series

RE 18306-03

Edition: 08.14

Replaces: 11.13

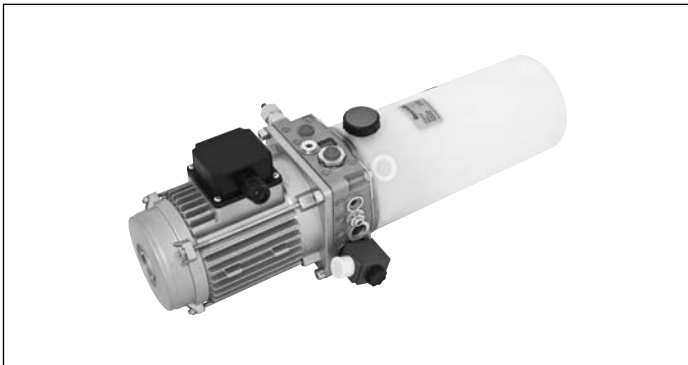

Contents

Ordering details for compact power modules for dock leveller with hinged lip (manifold code 66-67-68)	2
Ordering details for compact power modules for dock leveller with telescopic lip (manifold code 73-74)	4
General Technical Data for Compact Power Module DL	6
A.C. Electric Motor Compact Mounting Style for Power Module Type DL	11
Central Manifold DL	13
Flow Restrictor	18
Coil	19
Connectors	20
Gear Pumps	21
Oil Tanks for DL	22
Oil Tanks for DE	23
Mounting position	24
Terminal Box Position for A.C. Motors	24
Mounting Brackets	25

**Ordering details for compact power modules for dock leveller with hinged lip
 (manifold code 66-67-68)**

01	02	03	04	05	06	07	08	09	
DL	----	-	----	-	___/__(___)	-	----	-	___/___/---

Family

01	Power module type	DL
----	-------------------	----

A.C. Electric motor

02	Select the required AC motor shown in the catalogue. (See page 11)	
----	--	--

Junction Elements

03	The code of the Junction Element is showing in the page after the selected AC motor.	
----	--	--

Central Manifold

04	Central Manifold with Pressure range Sequence Valve + Request Setting of the Relief Valve DB in Bar between brackets + Request setting of the sequence valve V2 in Bar between brackets + Request setting of the Relief Valve DB2 in Bar between brackets (DB2 only for manifold code 68)	
----	---	--

Flow restrictor

05	Select the required setting of flow restrictor on B line (see page 18)	
----	--	--

Coil Model and Connector

06	Choice the required coil Voltage and the required Connector. (See page 19)	
----	--	--

Gear pumps

07	Is possible to select the required pump between Standard Version and Low Duty version. (See page 21)	
----	--	--


Oil Tank

08	Select the required Oil Tank (See page 22)	
----	--	--

Mounting Position and Mounting Brackets

09	Select the required working position of the Power Module and the position of the terminal box of the motor. If needed select a Mounting Bracket (See page 24)	
----	---	--

Ordering details for compact power modules for dock leveller with hinged lip (manifold code 66-67-68)

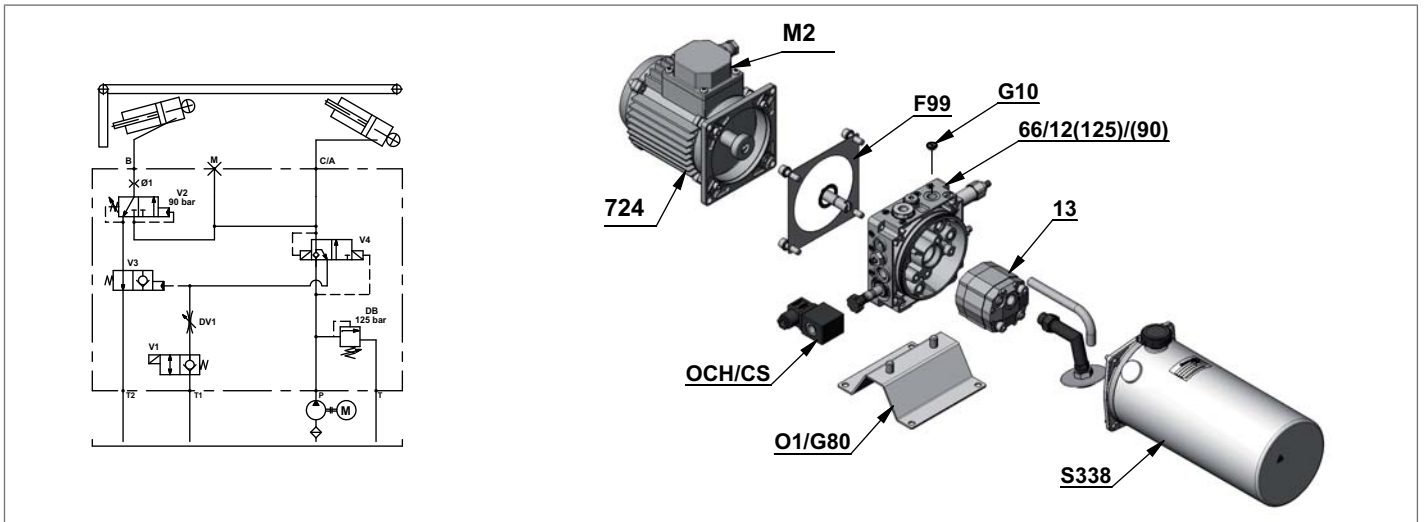

Example of Ordering Details

	01	02	03	04	05	06	07	08	09
DL	742	- F99	- 66 / 12 (125)/(90)	- G10	- OCH/CS	- 13	- S338	- O1 / M2/G80	
Power module type	AC Electric motor	Junction Element	Central Manifold with Pressure range Sequence Valve + Request Setting of the Relief Valve DB in Bar between brackets + Request setting of the sequence valve V2 in Bar between brackets	Setting of flow restrictor on B line	Coil Model and Connector	Gears pump	Oil Tank	Mounting Position and Mounting Brackets	

- 4 **DL series** | Compact power modules
 Ordering details for compact power modules for dock leveller with telescopic lip (manifold code 73-74)

Ordering details for compact power modules for dock leveller with telescopic lip (manifold code 73-74)

01	02	03	04	05	06	07	08	09							
DL	----	-	----	-	___/__(___)	-	----	-	___/___	-	----	-	----	-	___/___/___

Family

01	Power module type	DL
----	-------------------	-----------

A.C. Electric motor

02	Select the required AC motor shown in the catalogue. (See page 11)	
----	--	--

Junction Elements

03	The code of the Junction Element is showing in the page after the selected AC motor.	
----	--	--

Central Manifold

04	Central Manifold with Pressure range Relief Valve + Request Setting of the Relief Valve VM1 in Bar between brackets + Request setting of the Relief Valve VM2 in Bar between brackets + Request setting of the Relief Valve VM3 in Bar between brackets (VM3 only for manifold code 74)	
----	---	--

Flow restrictor

05	Select if needed the setting of flow restrictor on B line (see page 18)	
----	---	--

Coil Model and Connector

06	Choice the required coil Voltage and the required Connector. (See page 19)	
----	--	--

Gear pumps

07	Is possible to select the required pump between Standard Version and Low Duty version. (See page 21)	
----	--	--


Oil Tank

08	Select the required Oil Tank (See page 22)	
----	--	--

Mounting Position and Mounting Brackets

09	Select the required working position of the Power Module and the position of the terminal box of the motor. If needed select a Mounting Bracket (See page 24)	
----	---	--

Ordering details for compact power modules for dock leveller with telescopic lip (manifold code 73-74)

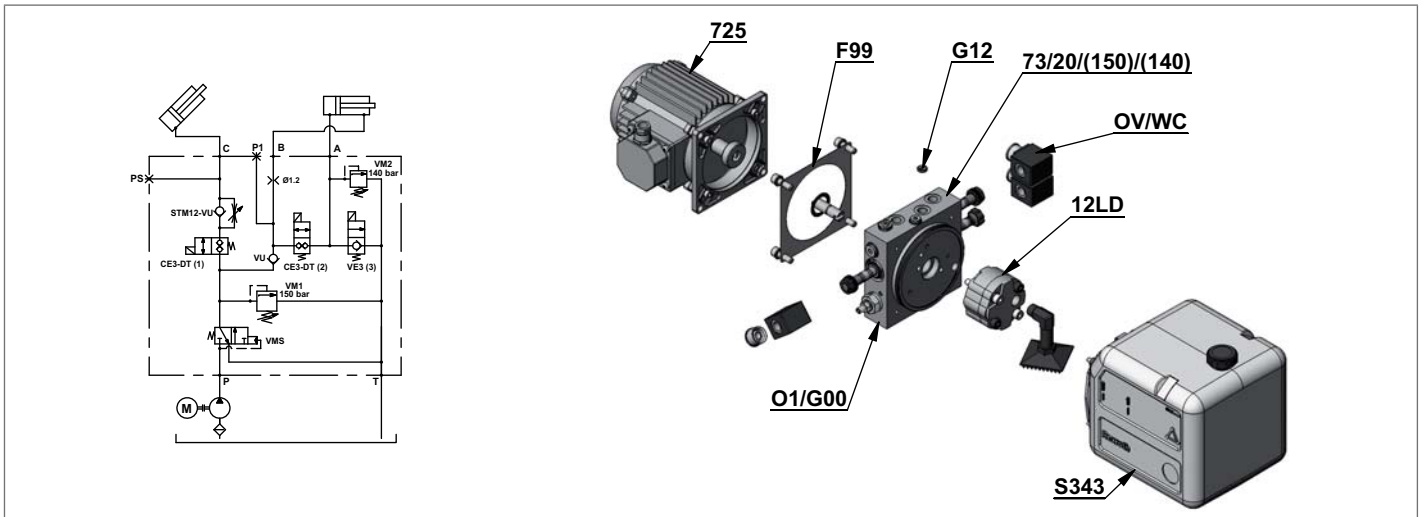

Example of Ordering Details


	01	02	03	04	05	06	07	08	09
DL	725	- F99	- 73 / 20 (150)/(140)	- G12	- OV/WC	- 12LD	- S343	- O1/G00	
Power module type	AC Electric motor	Junction Element	Central Manifold with Pressure range Relief Valve + Request Setting of the Relief Valve VM1 in Bar between brackets + Request setting of the Relief Valve VM2 in Bar between brackets.	Setting of flow restrictor on B line	Coil Model and Connector	Gears pump	Oil Tank	Mounting Position and Mounting Brackets	

General Technical Data for Compact Power Module DL

Application description:

A Dock leveller is a structure which is typically fixed at the doors of the warehouse to load/unload goods. It's used as

a crossing bridge by Forklift, Transpallet etc, between the floor of the warehouse and the truck. (Picture 1)

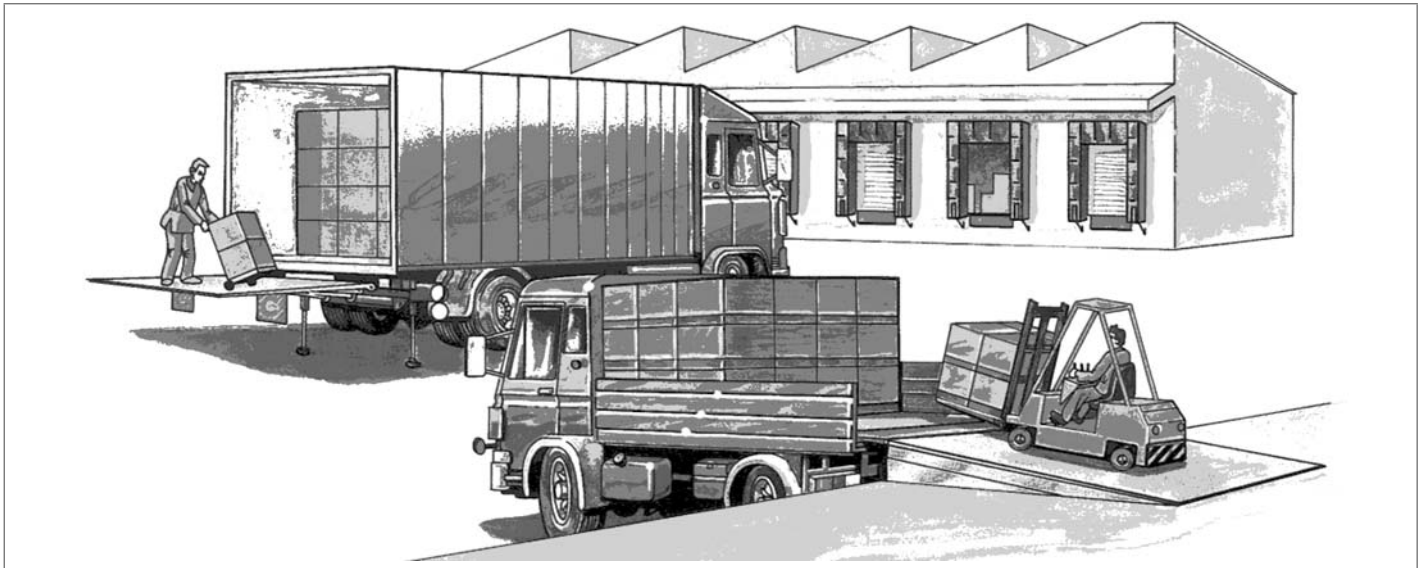


Picture 1 (Example of dock leveller)

Hydraulic system description:

In a Dock leveller the hydraulic system is characterized by a main single acting cylinder C (in some case 2 single acting cylinders connect to the same ports of the compact power module) for the lifting function and a single acting cylinder

to move the lip D in case of Dock leveller with a hinged lip (picture 2-3) or a double acting cylinder in case of Dock leveller with a telescopic lip. (Picture 4)

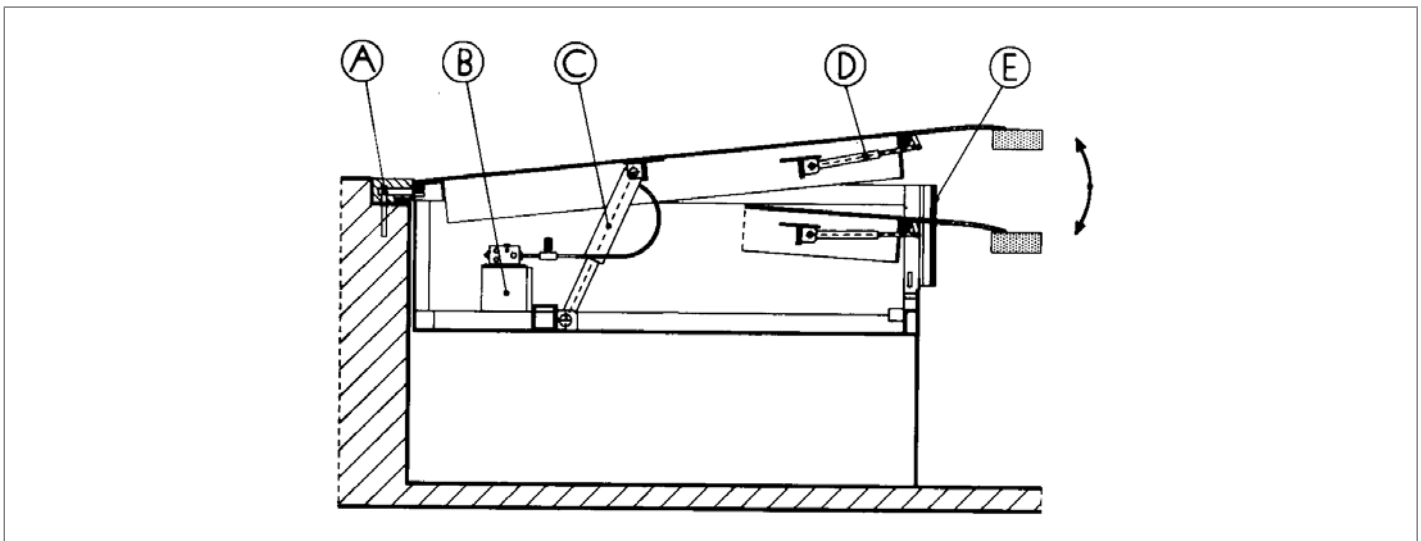

Picture 2 (typical Hydraulic Dock leveller scheme)

A) Dock leveller anchorage
 B) Compact Power Module

C) Single acting cylinder to lift the dock leveller
 D) Lip movement cylinder
 E) Rubber protection

How the system works:

Hydraulic Dock leveller with Single acting cylinders hinged lip (Picture 3)

Lifting phase: By switching on the electric motor, the gear pump pushes oil into the system and with the raising of the pressure the V4 valve changes over giving the possibility for the oil to push the main lifting cylinder connected to the port C/A; The solenoid valve V1 must always be energized or the system doesn't work.


When the main lifting cylinder arrives at the end of the run, the pressure increases and allows for the opening of the V2 sequence valve that starts to put oil into the hinged lip single acting cylinder connected to the port B; The opening speed is set by the dimension of the orifice Ø...

Lowering phase: By stopping the electric motor, the V4 valve changes over on to the normal position, so the oil goes to the return line, crossing the V1 and through the throttle valve DV1 which maintains a backpressure on the system that causes the changing over of the V3 valve that guarantees a backpressure on the lip single acting cylinder


and for this reason the lip remains lifted while the main single acting cylinder lowers down. When the main singleacting cylinder stops lowering, leaning on the truck, the pressure on the system is out and automatically the V3 valve goes on the normal position, allowing the oil to run on the return line and allowing the lip to lean on to the track. The Dock leveller remains free to swing to compensate the differences on the truck level during the loading/unloading operations.

Closing phase: To close the Dock leveller you need to restart the motor by lifting the main cylinder (in consequence the lip cylinder is going to close with a setting speed set by the orifice Ø...).


When the lip is completely close the motor can be switched off and the Dock leveller returns to the normal position. The V1 solenoid valve normally is connected to the emergency push button of the system. Pushing the emergency button the V1 valve return in closed position keeping the cylinder in position.

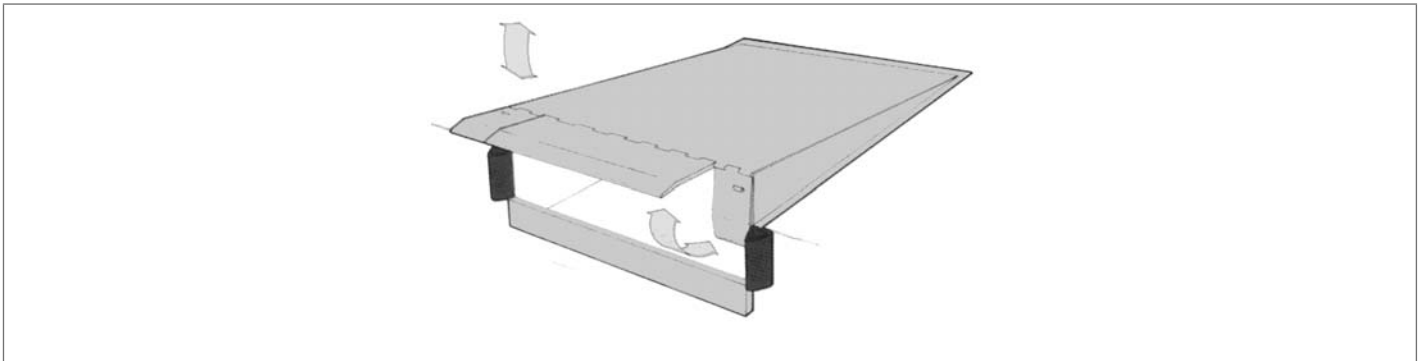

Picture 3 (Hydraulic hinged lip Dock leveller)

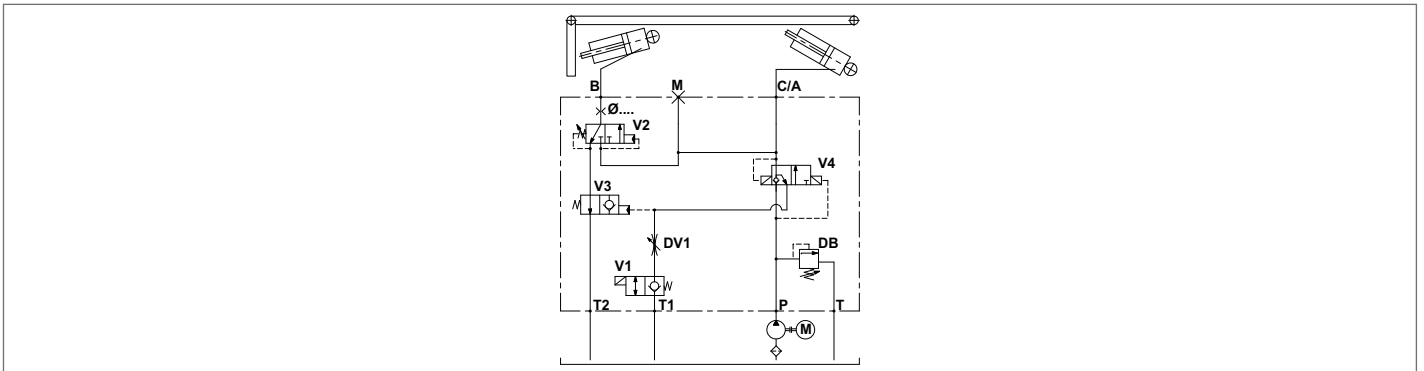

Scheme 1

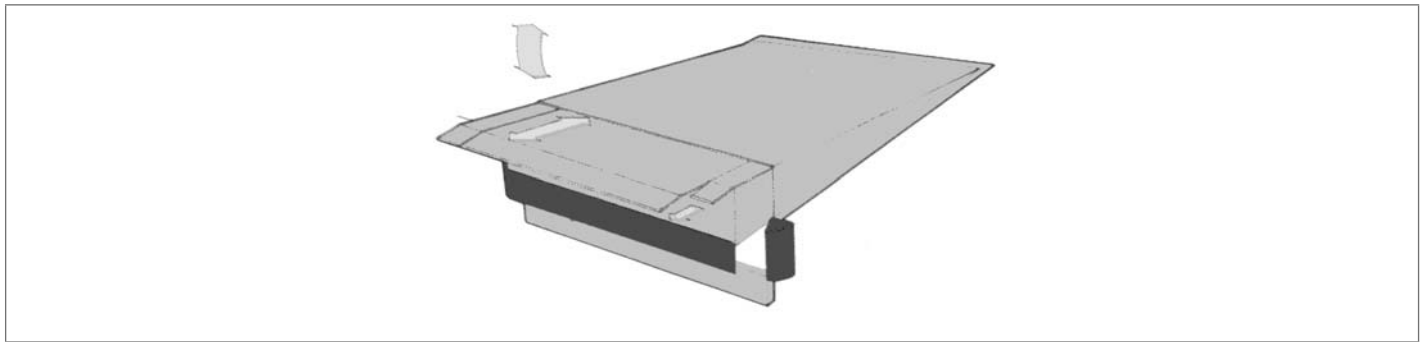

Picture 4 (Hydraulic telescopic lip Dock leveller)


Hydraulic Dock leveller with double acting cylinder telescopic lip (Picture 4).

Opening phase: On the opening phase you need to switch on the electric motor energizing simultaneously the CE3-DT (1) solenoid valve. The VMS valve changes over and the main cylinder connected to port C lifts: When the main cylinder arrives at the required position, we energize the CE3-DT (2) solenoid valve and in consequence the telescopic lip double acting cylinder comes out in a regenerative mode between the A zone and B zone. When the telescopic lip arrives at the end of stroke the motor is switched off and all the solenoid valves are switched off too, so that the Dock leveller is completely open. The lip exit speed is controlled by the orifice $\varnothing 1.2$ (optional).

Lowering phase: With the motor switched off the Dock leveller starts to lower itself energizing the CE3-DT (1) solenoid valve which moves the main cylinder, which lowers down until it is leaning itself on the truck. The lowering speed is controlled by the STM12-VU valve.

The VM2 relief valve that is located on the double acting cylinder A line works as an antishock during the lip exit phase and also as protection of the same in case of an occasional bump as the truck stops.

Closing phase. To bring back the Dock leveller to the sleeping position, we need to repeat the opening phase to lift the Dock leveller from the truck and after to retract back the lip we need to energize the VE3 (3) solenoid valve which puts the double acting chamber A on the return line.

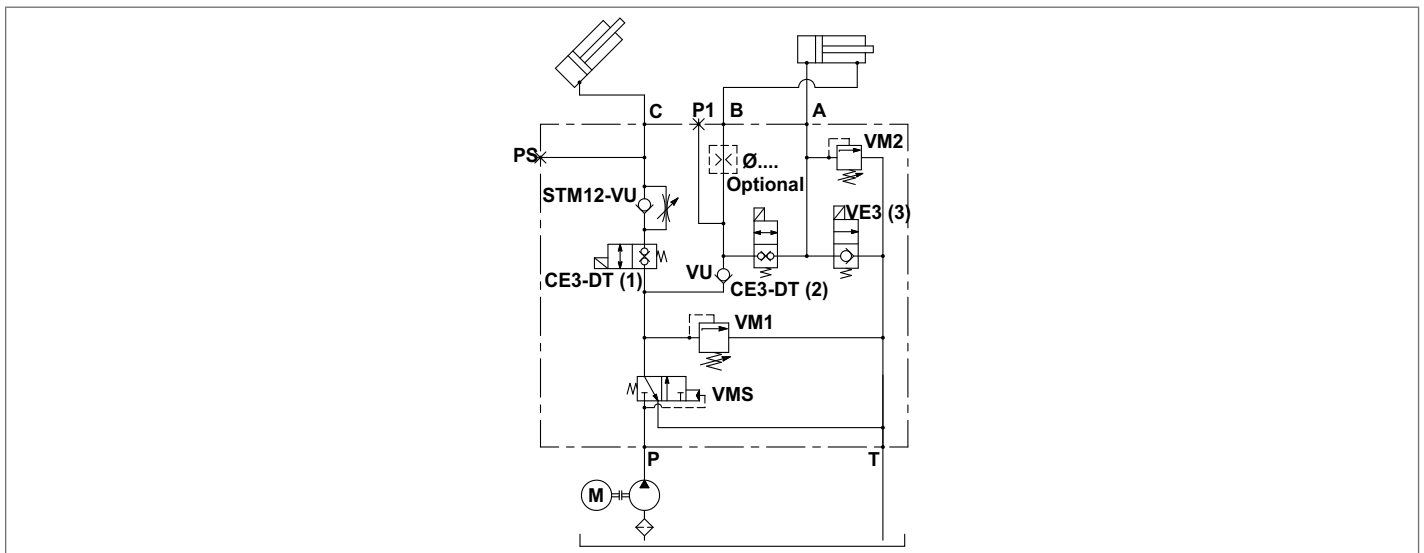

Scheme 2

Power module selection

Choose the circuit which meets your application requirements.

Take note of all dimensions resulting from the basic components chosen for your application.

NOTE: dimensions may vary slightly and should be confirmed by DCOC, if the assembly is to be installed in a space with narrow clearance.

The tank capacity and the tank dimensions need to be large enough to assure proper pump suction: there must always be a reserve of oil in the tank when all cylinders are fully extended and avoid overflow when cylinders are fully retracted.

The tank must be evaluated also for best separation of air from oil, and for settling down oil contamination. It should be placed in a space with, at least, natural ventilation and it should permit enough heat dissipation to prevent high fluid temperature.

Select the electric motor by evaluating the power needed and the motor compliance with the heat developed during the expected run time (or „duty cycle“).

Hydraulic fluid for compact power module

Mineral oil based hydraulic fluids suitable for hydraulic systems can be used; they should have physical lubricating and chemical properties as specified by:

MINERAL OIL BASED HYDRAULIC FLUIDS HL (DIN 51524 part 1)

MINERAL OIL BASED HYDRAULIC FLUIDS HL P(DIN 51524 part 2)

For use of environmentally friendly fluids please consult DCOC.

Fluid viscosity, Temperature range of the operating fluid, Ambient temperature

The fluid viscosity should remain within the range 10 to 300 cSt (centistokes); recommended 15 to 120 cSt .

Permissive cold start viscosity is maximum 2000 cSt .

The fluid temperature should remain within the range -15°C and 80°C (5°F and 176°F).

Note: For compact power module with plastic tank the fluid temperature should remain within the range -15°C and 70°C (5°F and 158°F).

Ambient temperature -15°C +40°C (5°F and 104°F).

Fluid cleanliness requirements and maintenance

We recommend a cleanliness of the operating fluid according to ISO 4406 Class 20/18/15 or cleaner.

All components of the hydraulic circuit , including hoses and actuators, must be flushed and cleaned before

assembling, because the compact power module has a suction filter only.

The hydraulic fluid should be replaced after the first 50 hours, and then every 1000 hours, or, at least, once a year.

Power module installation

The mounting position is basically unrestricted; just avoid installations that could compromise the pump suction, Typically in these applications the Compact Power Module is assembled in horizontal position. It is recommended to support the power module on vibration dampening blocks when the mounting structure is expected to vibrate.

Wiring and starting-up

The cable size and length from the power source to the electric motor should be selected in order to avoid voltage drop.

It is strictly forbidden to allow the backwards rotation of the pump even at the first starting: to prevent reverse rotation, the wiring polarities must be correctly connected.

Caution: when energized, the surface temperature of the electric motor could reach temperature levels of 60-80°C (140-176°F): care should be taken to avoid any accidental contact of people with the motor surface.

A.C. Motors

The tolerances on the nominal voltage are:

Single phase motor: 230V +/-5% - Three phase motor: 230-400V +/-10%.

Protection degree : IP54 (protection against dust and water splash).

Insulation class: F (155°C) (311°F).

All motors are aluminum alloy die cast without painting.

Central Manifolds

The Central Manifolds shown in the catalogue are made in die cast aluminium alloy or extruded aluminum alloy AL 2011 (Al-Cu5.5Pb0.4Bi0.4 UNI 9002/5).. The validation of the Central Manifolds follows a lifetest with 250 bar (3625 psi) pulsed pressure repeated for 300.000 cycles.

Built-in valves

The valves used in the central manifolds are manufactured using steel with high mechanical strength. Surface treatments protect the exposed parts to the external environment. Standard seals are NBR (BUNA-N) with backup rings in PTFE. The cartridge valves with “leak proof seat design” have an average leakage of 10-15 drops/minute (< 1 cm3/minute (0.06 in3/min)) at the maximum pressure using fluid ISO VG46 at 40°C (104°F). The

validation of the cartridge valves follows a life-test at pulsed maximum pressure (indicated for each valve) repeated for 500.000 cycles.

All the solenoid cartridge valves are fitted with protective O-Rings installed between the pole tube and the coil. These O-Rings protect the internal parts from condensation and contaminants, which could cause malfunction.

All the solenoid cartridge valves are designed for operating in D.C..

Power supply in A.C. requires a connector with bridge rectifier included.

External Gear Pumps

DCOC offers a wide range of External Gear Pumps to cover different kind of applications. The standard version are suitable for the biggest part of applications. The Low Duty pumps are a dedicated series of pumps for this kind of applications that are particularly cost effective. All the pumps are pressure compensated to guarantee the best efficiency.

Oil Tanks

In this catalogue you will find a wide selection of steel and plastic tanks available as a standard product. Steel tanks have Black paint finish and are suitable for operating temperature range -15°C / +80°C (5°F / 176°F). Plastic tanks are obtained in one piece in order to avoid welded parts that are weak points at extreme temperature and vibrations. Plastic tanks are suitable for operating temperature range -15°C / +70°C (5°F / 158°F).

Note: even if the plastic tank mounting system is designed to avoid oil leakage the tank must be securely anchored when fitted in mobile equipment and when subject to shocks and heavy vibrations. Please check that the anchorages do not stress or deform the tank.

European machine directive 2006/42/CE

According to the Machine Directive 2006/42/CE, a complete power module, as described in paragraph 15 and made available to the European market, enters into the definition of „partly completed machinery“.

Instead, the power module subassemblies (motor, pump, reservoir, central manifold,...), when not assembled into a complete power pack, are considered „components“ which can be employed in a „machinery“ or a „partly completed machinery“. In this case, the DCOC components and subassemblies must be fitted in compliance with all the relevant technical data sheet applicable to the product, and shall not be operated, adjusted or disassembled before the complete machinery where they are incorporated has been

declared to be in compliance with the Machine Directive 2006/42/CE.

Note


All the components shown in the catalogue ARE NOT suitable for use in potentially explosive atmosphere.

Technical information

Below you will find the most common equations used in hydraulics:


	Common Units	Symbols	Equations
Flow	l/min	Q	$Q = \frac{D \times n}{1000} \times 0,95$
Operating pressure	bar	P	$P = \frac{F}{0,1 \times A}$
Internal diameter hydraulic cylinder	mm	d	–
Area of hydraulic cylinder	mm ²	A	$A = \frac{\pi \times d^2}{4}$
Piston force	N	F	–
Drive shaft	rev/min	n	–
Power requirement for motor	kW	N	$N = \frac{P \times Q}{612}$
Pump displacement	cm ³ /rev	D	–
Torque requirement	Nm	M	$M = \frac{D \times d^2}{62,8 \times 0,87}$

A.C. Electric Motor Compact Mounting Style for Power Module Type DL

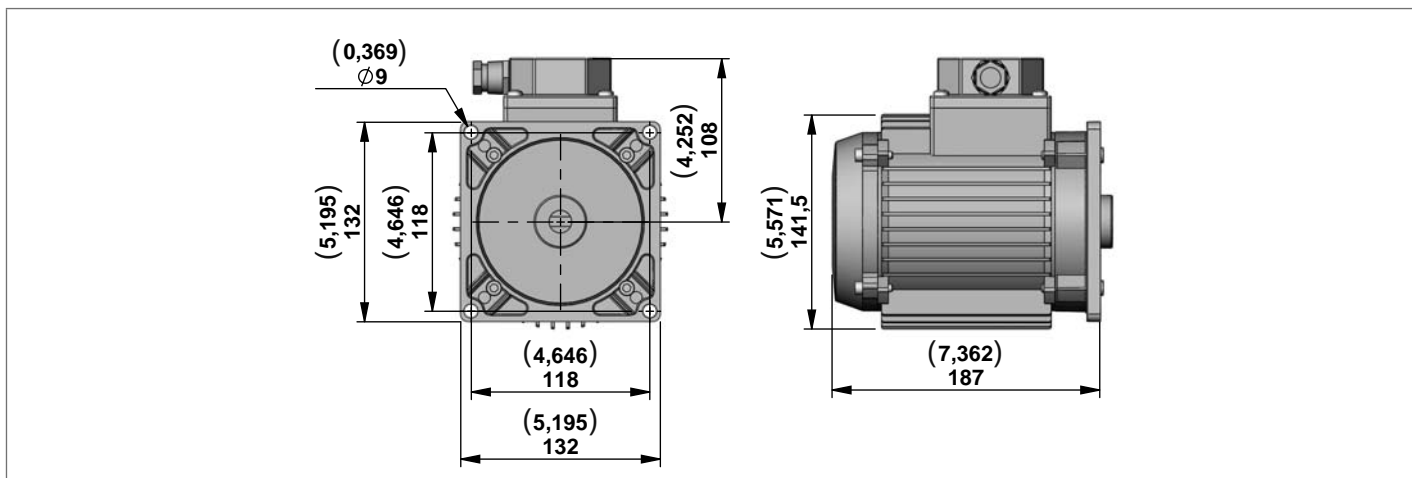

**Three Phase Current Motors 230/400V 50Hz
IP54 Size IEC 71**

Code	Type	Material Number	Power (kW)	Power (hp)	Poles	Rpm at 50Hz	Duty Cycle	Thermal Switch
724	C1622S1085C	R932000302	0,75	1	2	2900	S3 30%	no
724T	C1622S1368C	R932006634	0,75	1	2	2900	S3 30%	yes
725	C1622S1083C	R932000301	1,1	1,5	2	2900	S3 30%	no
725T	C1622S1374	R932000423	1,1	1,5	2	2900	S3 30%	yes

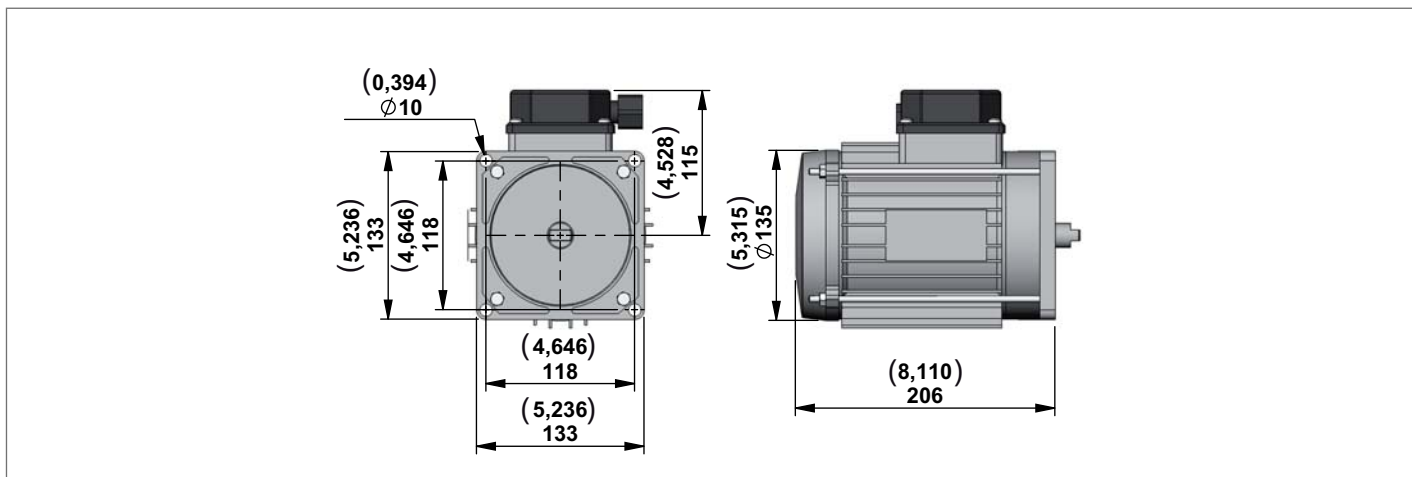

**Three Phase Current Motors 230/400V 50Hz
IP54 Size IEC 80**

Code	Type	Material Number	Power (kW)	Power (hp)	Poles	Rpm at 50Hz	Duty Cycle	Thermal Switch
826T	C1622S1410C	R932011320	1,5	2	2	2800	S3 20%	yes
827T	C1622S1409C	R932011321	2,2	3	2	2800	S3 15%	yes


The motors shown in these tables are a selection of our range.
 In case of needs of different technical characteristics
 PLEASE CONTACT OUR SALES DEPARTEMENT.

NOTE


The electric motors shown in this pages are delivered by different certified suppliers.
 This means the indicated dimensions could change a little, depending on which manufacturer will be assembled. On the CPM the choice of the manufacturer is based on our stock availability.

Junction Elements for A.C. Electric Motor Compact Mounting Style for Power Module Type DL

F99

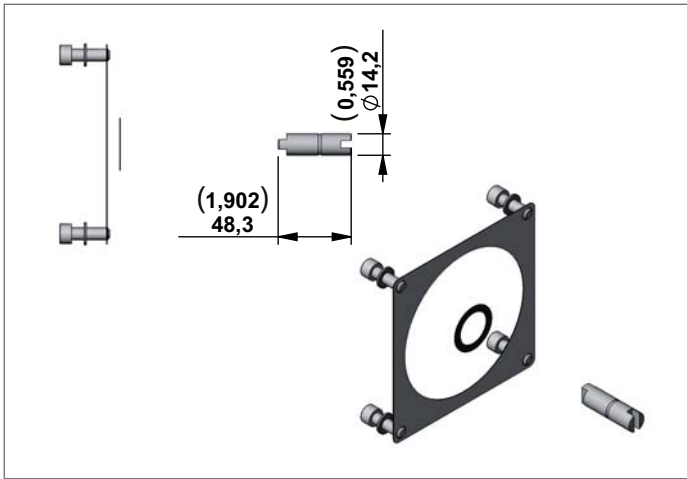

TR08

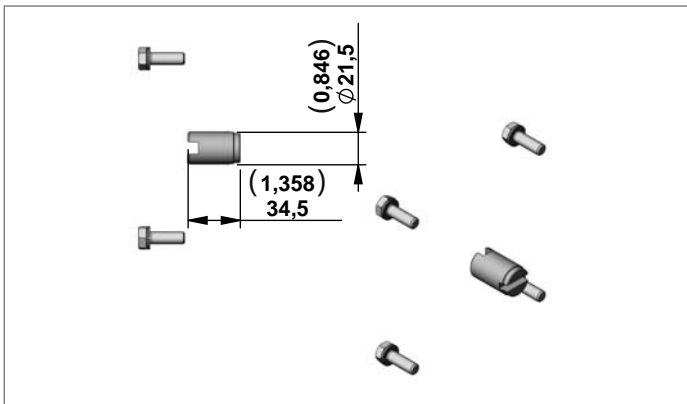


Junction Elements for manifolds MT


Code	Motor Codes	Size IEC	Type	Material Number
F99	724-724T-725-725T-745	71	K01K3970TR105	R932001934
TR08	826-826T-827-827T	80	K01KE970TR008	R932001900

Central Manifold DL

66

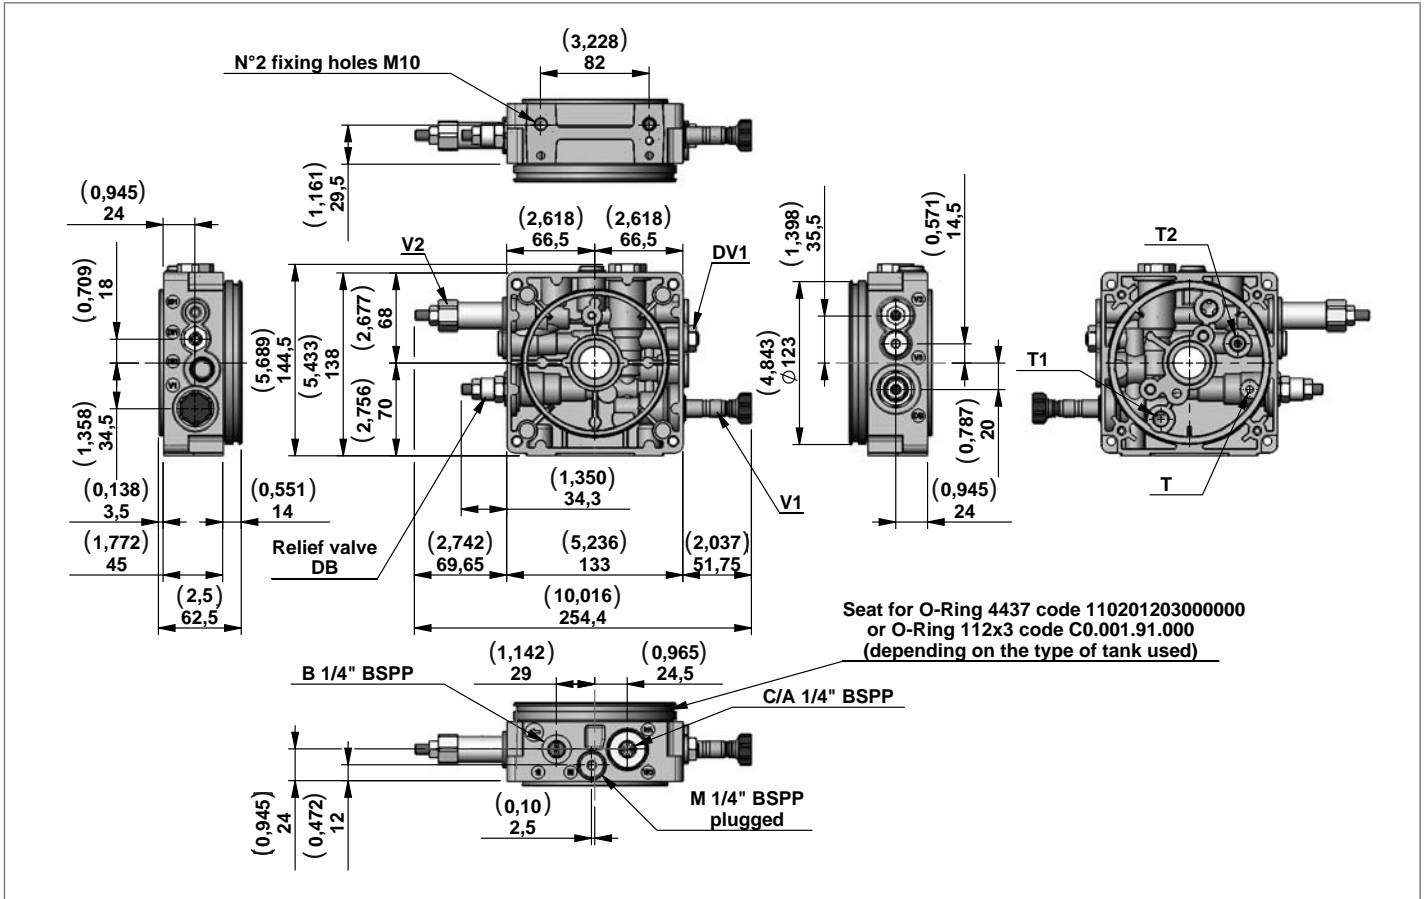


Manifold Hydraulic Diagram

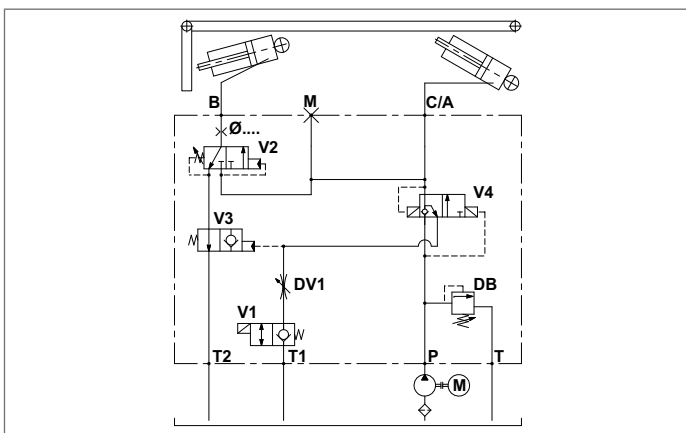


Manifold code with Sequence Valve pressure range	Pressure range Relief Valve DB bar (psi)	Pressure range Sequence Valve V2 bar (psi)	Type	Material Number
66/12	80-250 (1160-3626)	30-120 (435-1740)	766C120NG	R930052303
66/17	80-250 (1160-3626)	60-170 (870-2465)	766C150NG	R930052304

67

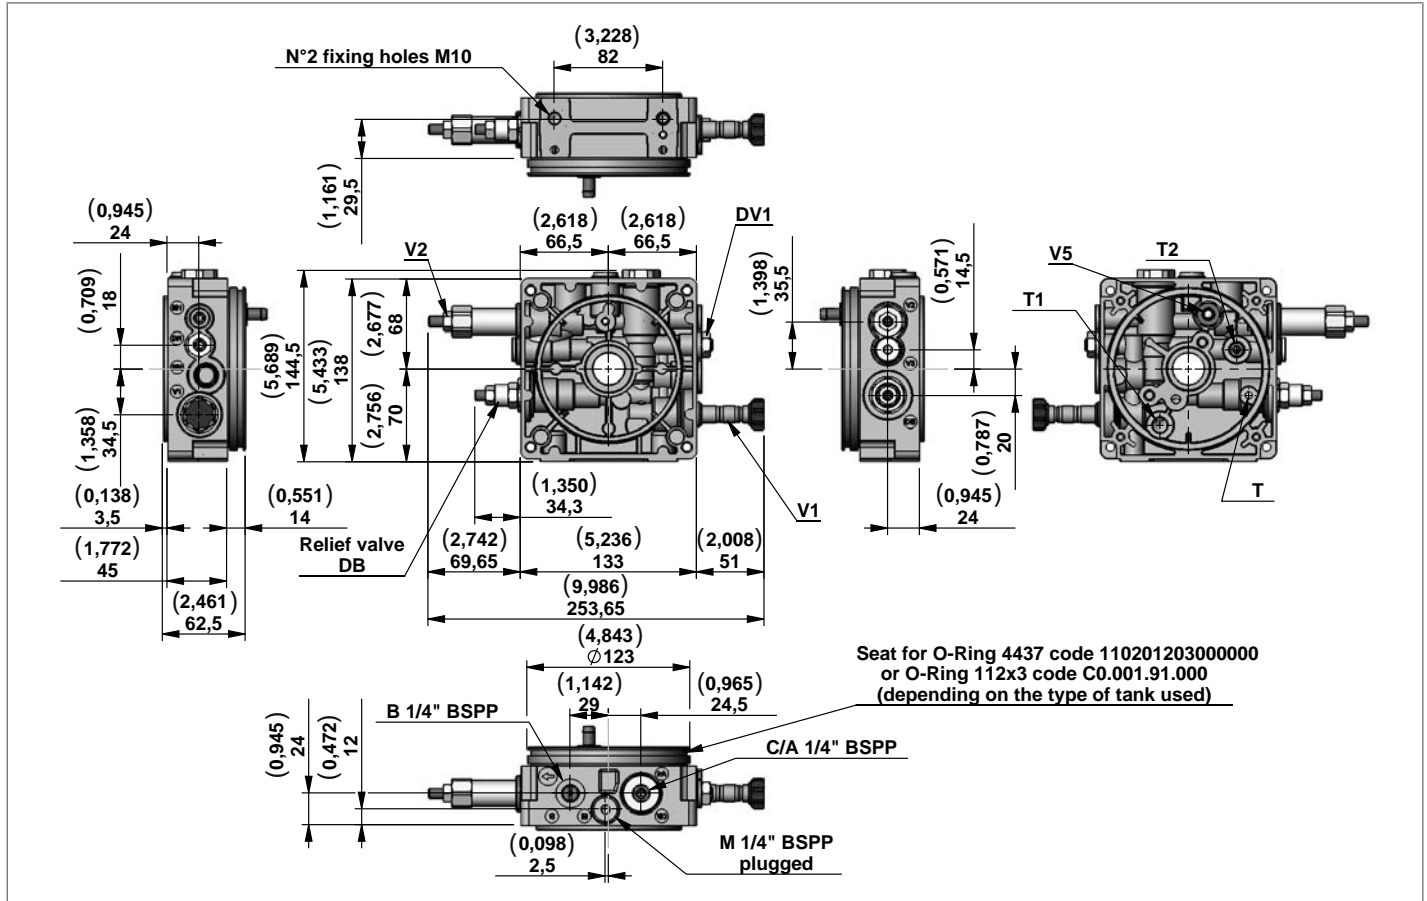


Manifold Hydraulic Diagram

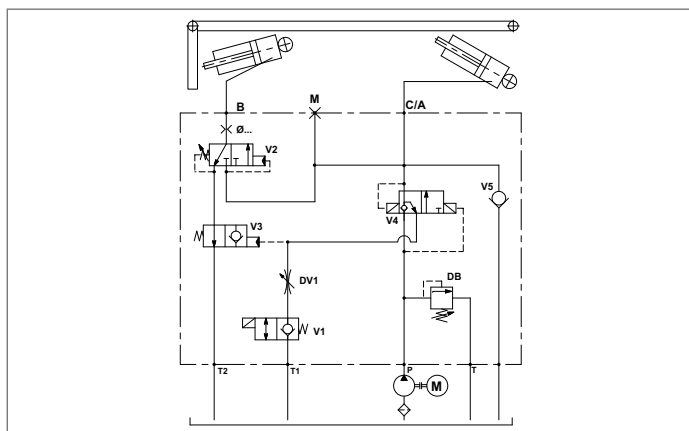


Manifold code with Sequence Valve pressure range	Pressure range Relief Valve DB bar (psi)	Pressure range Sequence Valve V2 bar (psi)	Type	Material Number
67/12	80-250 (1160-3626)	30-120 (435-1740)	767C120NG	R930052305
67/17	80-250 (1160-3626)	60-170 (870-2465)	767C150NG	R930052306

68

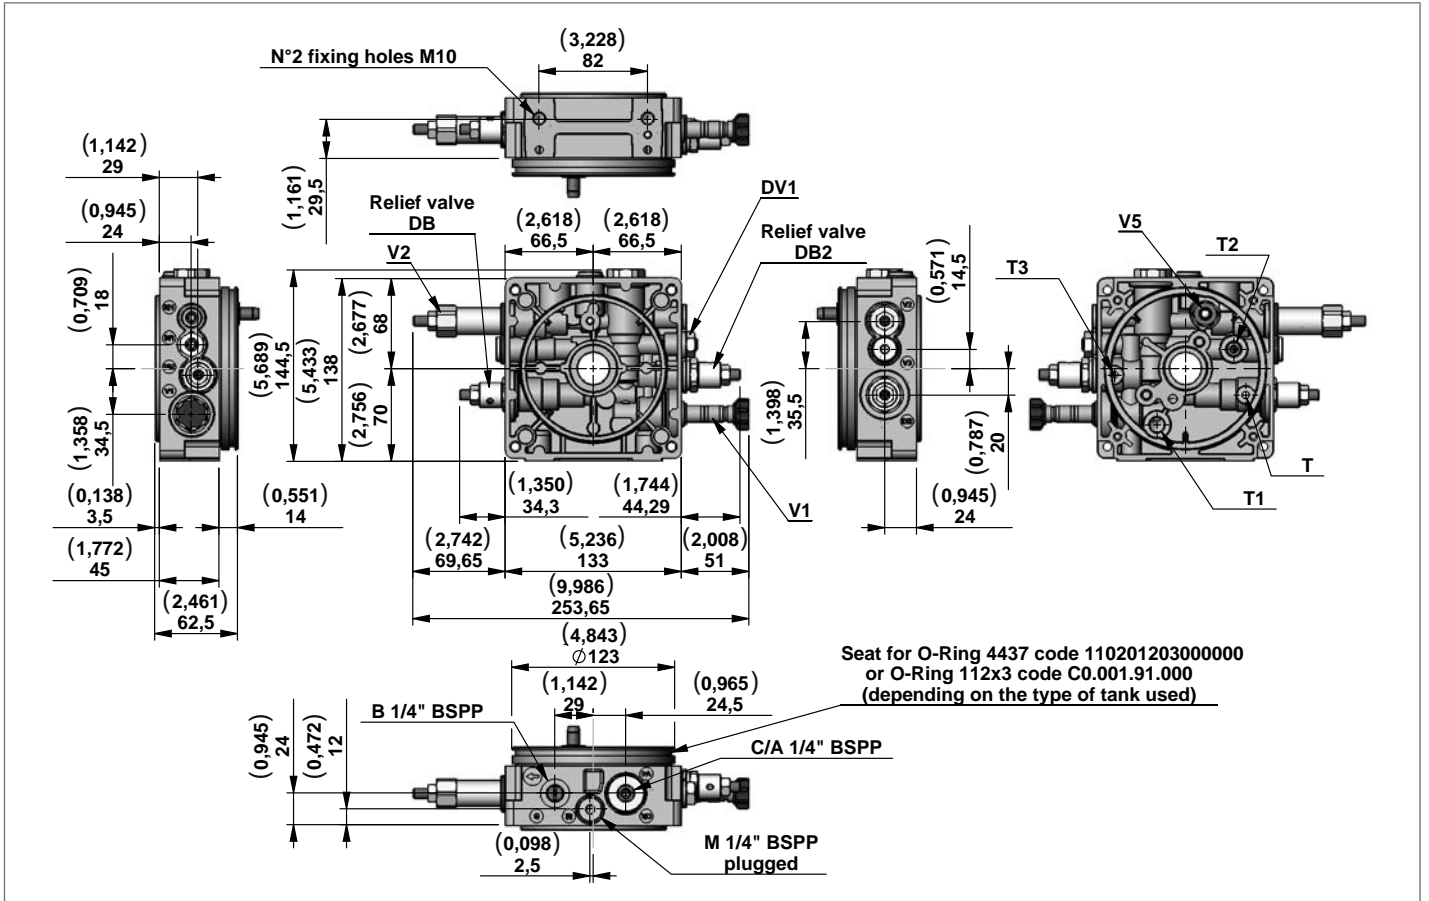


Manifold Hydraulic Diagram

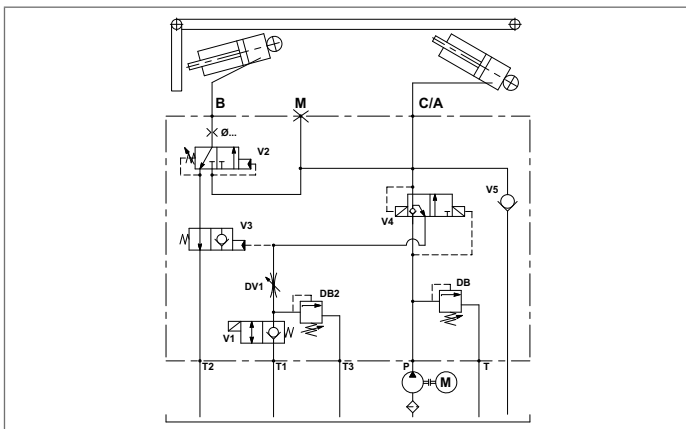


Manifold code with Sequence Valve pressure range	Pressure range Relief Valve DB bar (psi)	Pressure range Relief Valve DB2 bar (psi)	Pressure range Sequence Valve V2 bar (psi)	Type	Material Number
68/12	80-250 (1160-3626)	30-120 (435-1740)	30-120 (435-1740)	768C120NG	R930052307
68/17	80-250 (1160-3626)	30-120 (435-1740)	60-170 (870-2465)	768C150NG	R930052309

73

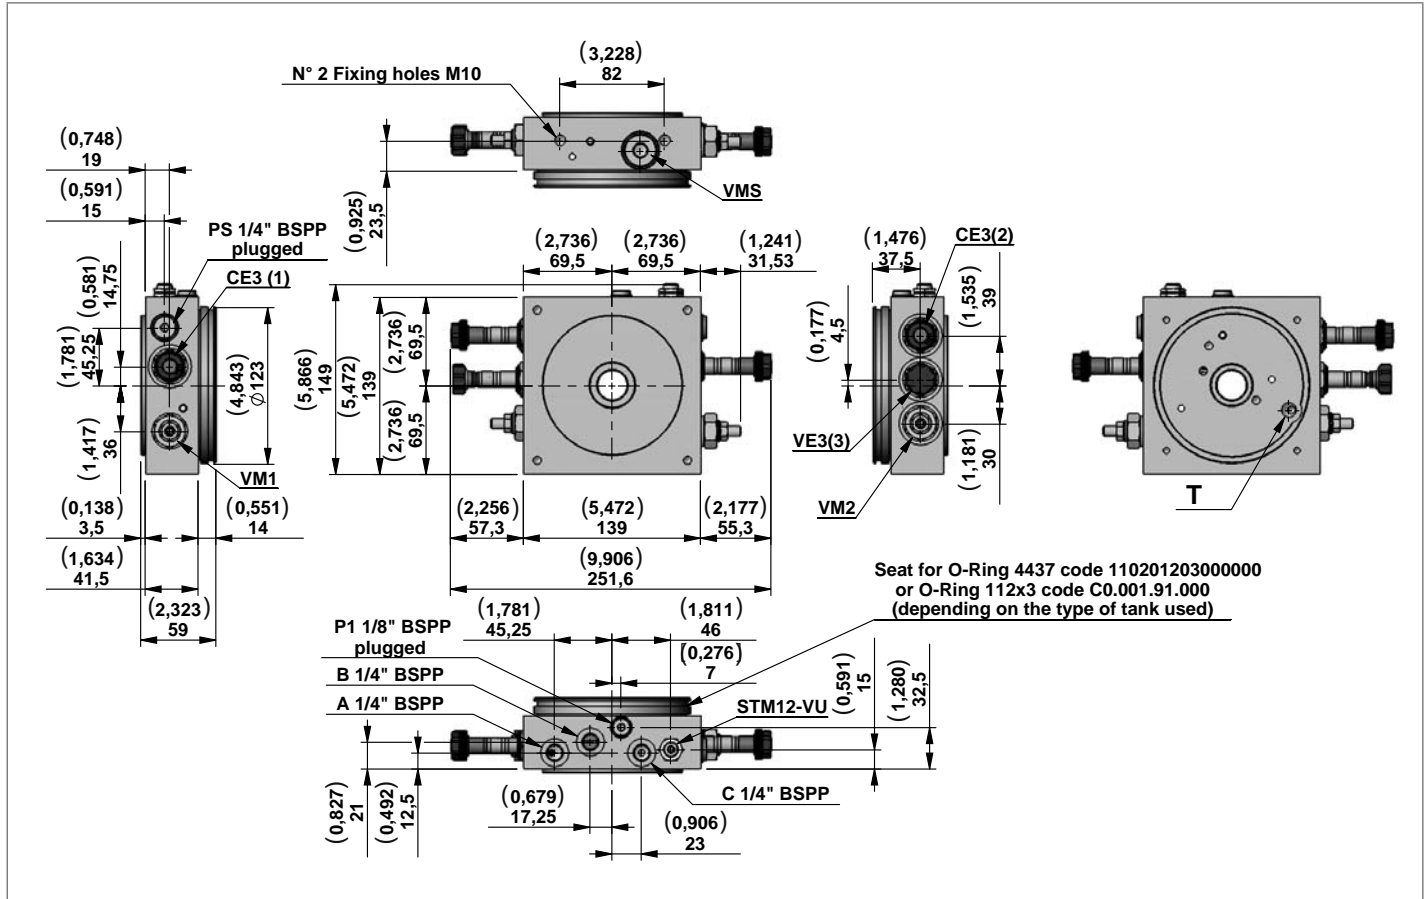


Manifold Hydraulic Diagram

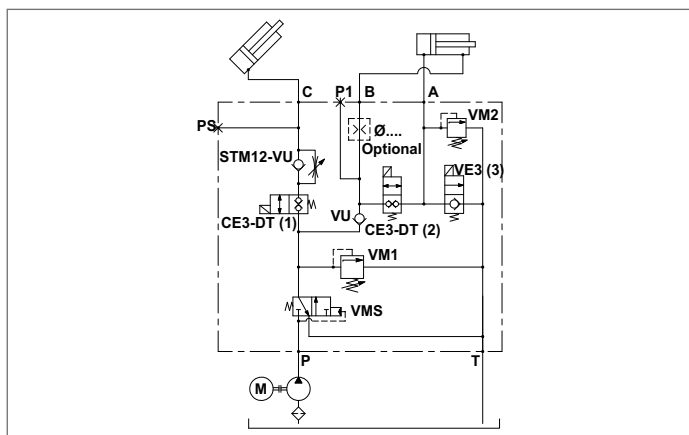


Manifold code with Relief Valve pressure range	Pressure range Relief Valve VM1 bar (psi)	Pressure range Relief Valve VM2 bar (psi)	Type	Material Number
73/20	105-210 (1523-3046)	105-210 (1523-3046)	773C150NG	R930052310

74

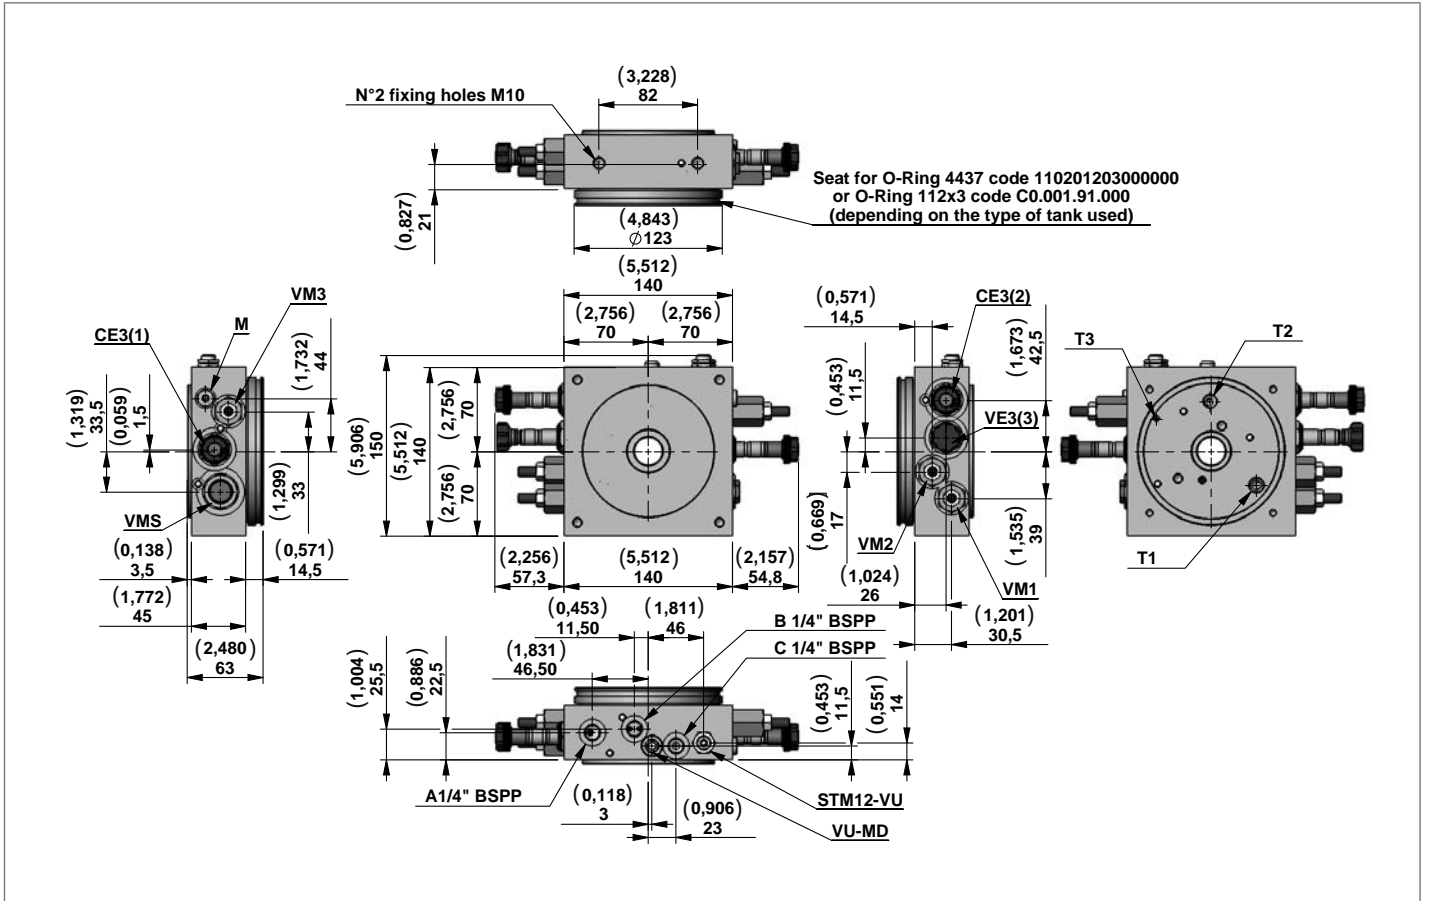


Manifold Hydraulic Diagram

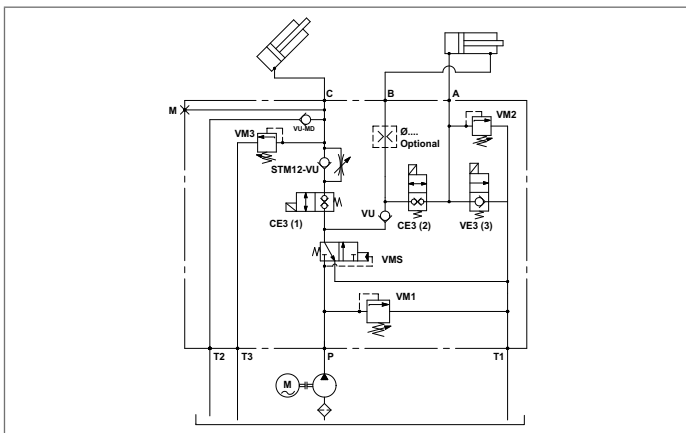

Manifold code with Relief Valve pressure range	Pressure range Relief Valve VM1 bar (psi)	Pressure range Relief Valve VM2 bar (psi)	Pressure range Relief Valve VM3 bar (psi)	Type	Material Number
74/20	60-220 (870-3191)	60-220 (870-3191)	60-220 (870-3191)	774C150NG	R930052311


Flow Restrictor

Flow restrictor for manifold code 66-67-68

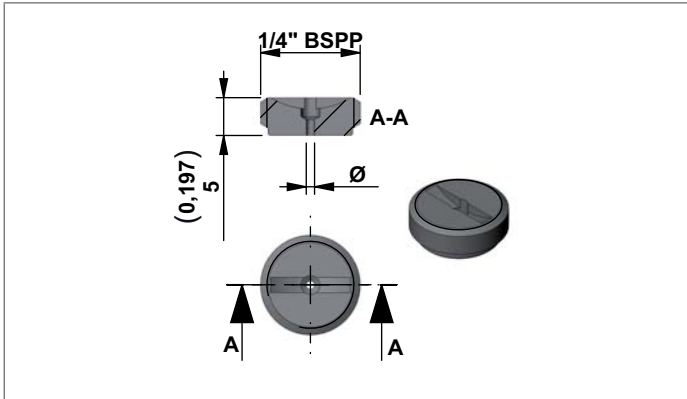

Code	Ø of flow restrictor mm	Material Number
G00	Without flow restrictor	
G07	0,7	R930046181
G08	0,8	R930051905
G11	1,1	R930046182
G13	1,3	R930046183
G15	1,5	R930046184
G18	1,8	R930046185

Flow restrictor for manifold code 73-74

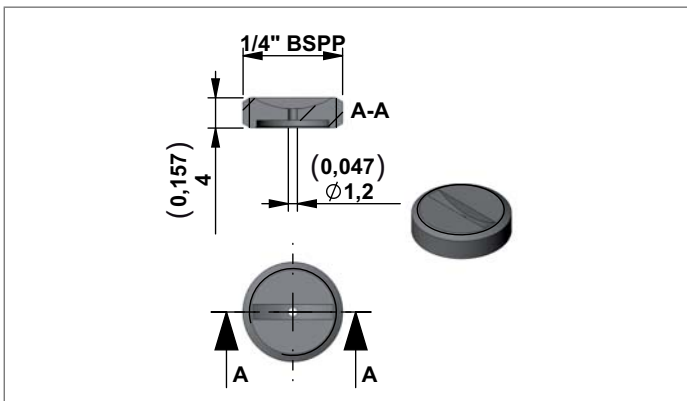

Code	Ø of flow restrictor mm	Material Number
G00	Without flow restrictor	
G12	1,2	R930046187

Coil

S-CE – 18W – ED 100%

DIN 43650 - ISO 4400 IP65 with connector assembled


Coil protection: IXEF for Heat insulation class H [180°C (356°F)].

Solenoids “S-CE” (18 W) are designed for continuous duty ED100%.

Ambient temperature range : -15°/+40°.

Inlet voltage fluctuations must not exceed +/- 10% of nominal voltage to obtain correct operations and long life coils.

Protection degree: see tables below.

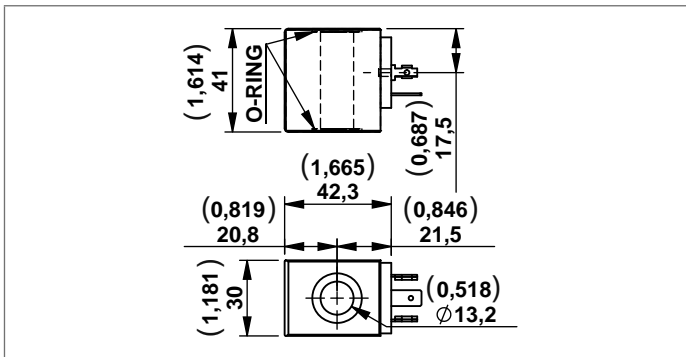


Code	Voltage	Heat Insulation class	Type	Material Number
OBH	12 Volts D.C.	H [180°C (356°F)]	C166462OB1	R932000819
OCH	24 Volts D.C.	H [180°C (356°F)]	C166462OC1	R932000820
OV	24 Volts RAC	H [180°C (356°F)]	C166462OV1	R932000821
OZ	220 Volts RAC	H [180°C (356°F)]	C166462OZ1	R932000822

Connectors

CONNECTOR IP67 - EN175000 (DIN 4350-A) / ISO 4400

Ambient temperature - Standard	°C (°F)	- 20 to + 60 (-4 to +140°F)	
Type of protection according to DIN 40050		IP67 with cable socket mounted and locked	
Operating voltage	V	Choose the proper ordering code according to the circuit	
Maximum operating current	Standard	A	16
	With rectifier	A	1
Number of pins		2 + PE	
Clamping range for cables having an outer diameter of	mm (inch)	5, up to 10 (0,2 up to 0,4)	
Cable entry		Pg9 / Pg11 (unified)	
Maximum cable cross-section	mm ² (inch ²)	1.5 (0,002)	

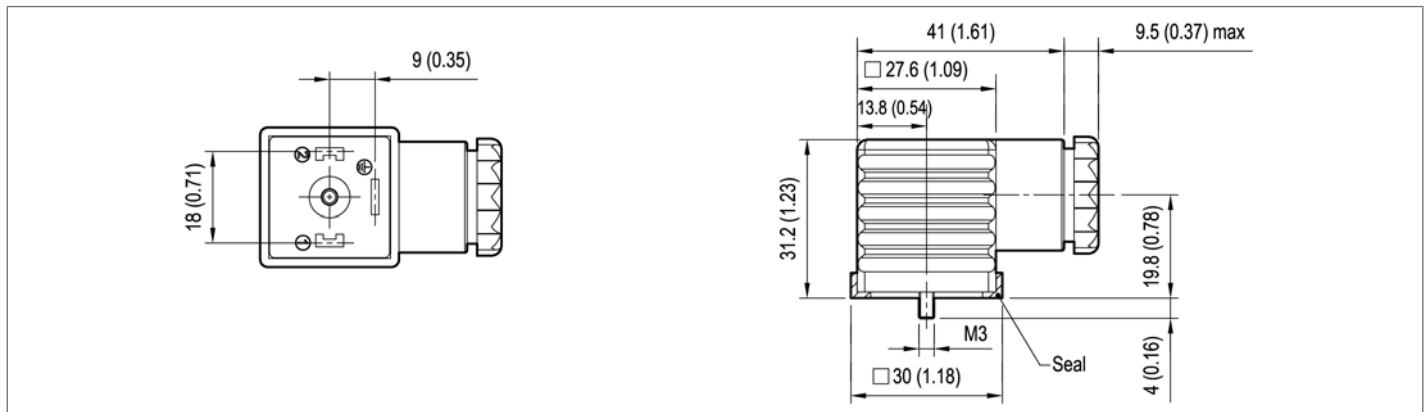

Standard Circuit

Code	Colour	Cable entry	Type	Material Number
WC	Without Connector			
CS	black	Pg9 / Pg11	OD016901000000	R934004344

Circuit with VDR + Wave Rectifier


Code	Voltage V		Diode Capacity I max	Colour	Cable entry	Type	Material Number
	AC	DC					
CR	230	/	1A	black	Pg9 / Pg11	OD01690201OZ00	R934004353

Note

Diode with capacity max 1 Amp.

Gear Pumps

Gear Pumps Group 1 for DL

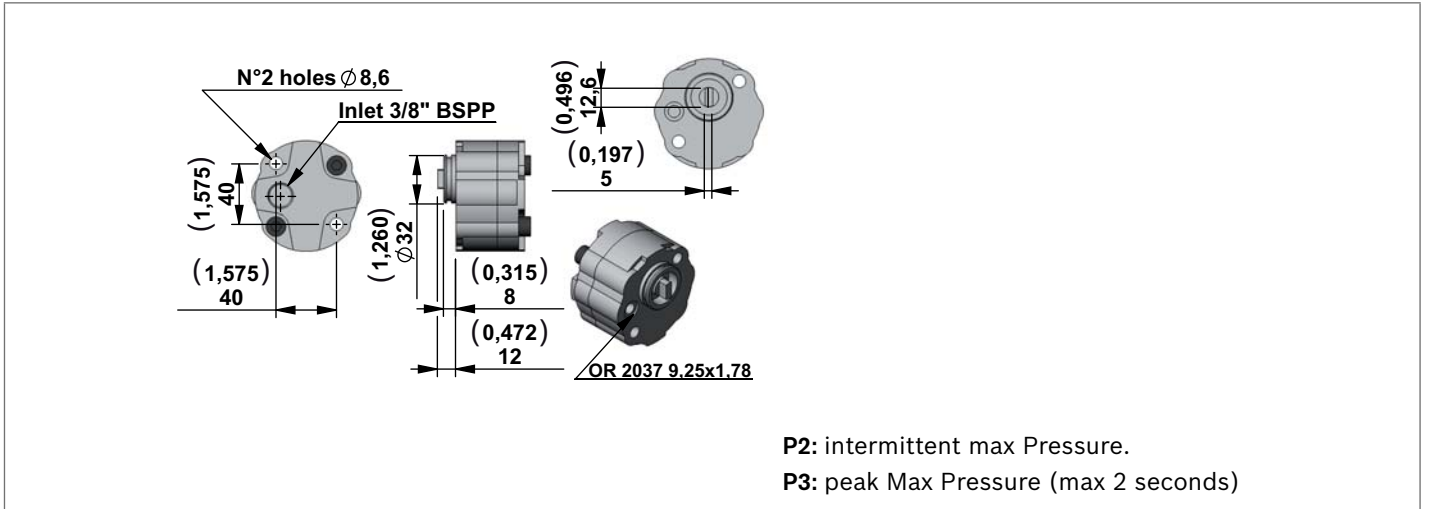

Code	Displacement cc/rev	Flow at 1500 rpm l/min (gpm)	P2 bar (psi)	P3 bar (psi)	Type	Material Number
11LD	1,2	1,8 (0,48)	210 (3046)	230 (3336)	K01CV640070HP	R930051417
12LD	1,7	2,55 (0,67)	210 (3046)	230 (3336)	K01CV640080HP	R932010351
13LD	2,2	3,3 (0,87)	210 (3046)	230 (3336)	K01CV640090HP	R932010352
14LD	2,6	3,9 (1,03)	210 (3046)	230 (3336)	K01CV640100HP	R930051433
15LD	3,2	4,8 (1,27)	210 (3046)	230 (3336)	K01CV640110HP	R930051437

Note

All pumps have anti-clockwise rotation.

Oil Tanks for DL

Technical Data for Plastic Tanks

Temperature range	°C (°F)	-15....+70 (5....158)
Materials	PE=Polyethylene - PP=Polypropilene	
Seal	For tanks codes S335-S336-S337-S338 is necessary to use the O-RING Ø112x3 Code: C000191000 R-Number:R932000190. For all the other tanks except the codes above is necessary to use the O-RING 4437 (Ø110,7x3,53) Code:110201203000000 R-Number:R932000188	

Code	Tank capacity l (USgal)	Useable capacity l (USgal)	L mm (inch)	Material	Type	Material Number		
S335	1,0 (0,26)	0,7 (0,18)	140 (5,51)	PP	K01K3976SE372	R932002035		
S336	1,8 (0,48)	1,2 (0,32)	180 (7,09)		K01K3976SE373	R932002036		
S337	2,5 (0,66)	1,7 (0,45)	240 (9,45)		K01K3976SE374	R932002037		
S338	3,0 (0,79)	2,3 (0,61)	285 (11,22)		K01K3976SE375	R932002038		
							For this tanks is necessary to use the O-RING Ø112x3 code: C000191000 R-Number: R932000190	
S247	1,8 (0,48)	1,6 (0,42)	170 (6,71)	PE	K01K3976SE271	R932002017		
S248	2,5 (0,66)	2,2 (0,58)	240 (9,45)		K01K3976SE272	R932002018		
S343	5,0 (1,32)	3,8 (1,00)	230 (9,05)	PE	K01K3976SE380	R932002039		
S331	5,0 (1,32)	3,8 (1,00)	230 (9,05)	PE Black	K01K3976SE368	R932007872		
S413	7,0 (1,85)	5,5 (1,45)	310 (12,20)	PE	K01K3976SE439	R932007873		
S414	7,0 (1,85)	5,5 (1,45)	310 (12,20)	PE Black	K01K3976SE440	R932007874		
S415	8,0 (2,11)	6,5 (1,72)	335 (13,19)	PE	K01K3976SE441	R932006036		
S416	8,0 (2,11)	6,5 (1,72)	335 (13,19)	PE Black	K01K3976SE442	R932007875		
S374	5,0 (1,32)	4,0 (1,06)	219 (8,62)	PE	K01K3976SE415	R932002042		
S376	7,0 (1,85)	5,4 (1,43)	271 (10,67)		K01K3976SE417	R932002044		
S378	8,0 (2,11)	6,6 (1,74)	323 (12,72)		K01K3976SE419	R932002046		
S380	11,0 (2,91)	9,6 (2,54)	453 (17,83)		K01K3976SE421	R932002048		

Assembly Kit for Plastic Tank - DL


Oil Tank	Code for DL	Material Number	Please make sure that the tank and motor are mounted correctly
S335 - S336 - S337 - S338	K2501VT016	R932007391	
S247 - S248	K2501VT015	R932008244	
S343 - S331 - S413 - S414 - S415 - S416 - S374 - S376 - S378	K2501VT026	R930053718	

Oil Tanks for DE



Technical Data for Plastic Tanks

Temperature range	°C (°F)	-15....+70 (5....158)
Materials		Steel
Colors		Black paint finish
Seal		For all the steel tanks is necessary to use the O-RING 4437 (Ø110,7x3,53) Code: 110201203000000 R-Number: R932000188





Code	Tank capacity l (USgal)	Useable capacity l (USgal)	L mm (inch)	Type	Material Number
S03SD	5,0 (1,32)	4,0 (1,06)	219 (8,62)	K01K3976SE005SD	R932007901

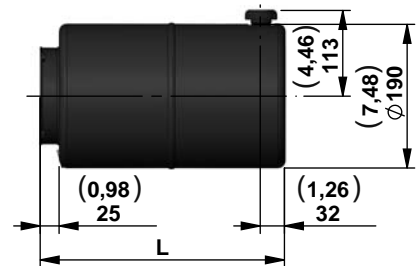

Mounting position

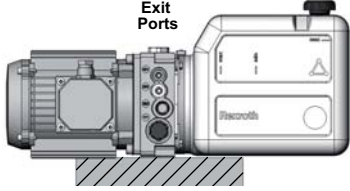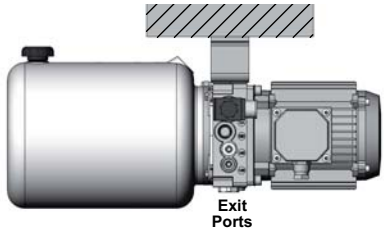Mounting position		1	2
Code	Image		
01	1		
02	2		


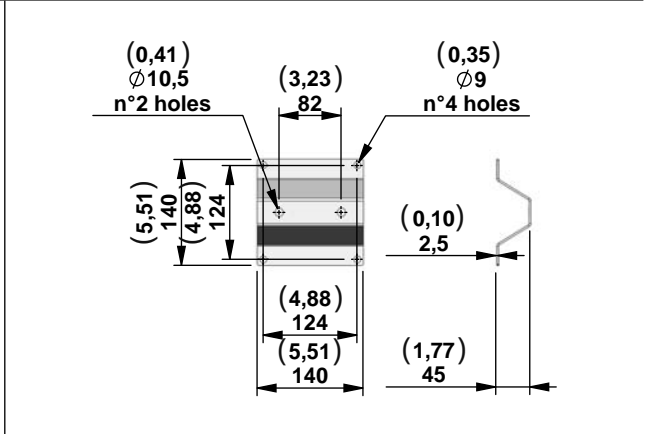
Terminal Box Position for A.C. Motors

Terminal Box Position for A.C. Motors		6-Standard	7
Code	Image		
-	6		
M2	7		
M3	8		
M4	9		

Mounting Brackets


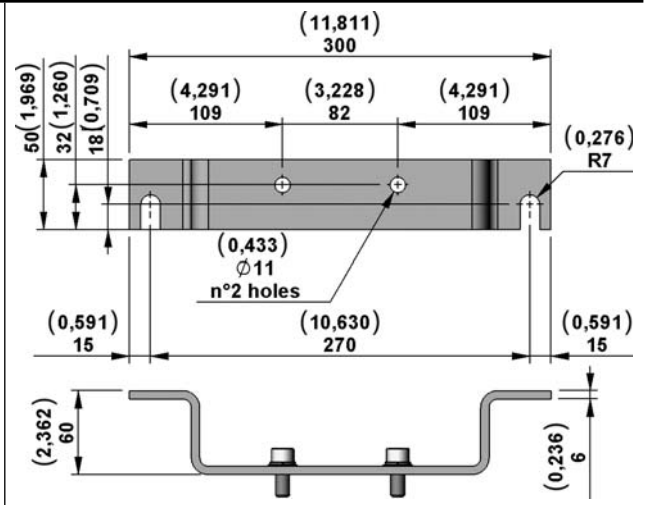
Code	Central manifold	Type	Material number
------	------------------	------	-----------------

G80	DL	K01F331514000	R932009395
------------	----	---------------	------------

Code	Central manifold	Type	Material number
------	------------------	------	-----------------

G87	DL	K01K331523000	R932010187
------------	----	---------------	------------

Bosch Rexroth Oil Control S.p.A.

Oil Sistem Division

Via Artigianale Sedrio, 12

42030 Vezzano sul Crostolo

Reggio Emilia - Italy

Tel. +39 0522 601 801

Fax +39 0522 606 226 / 601 802

compact-hydraulics-cpm@boschrexroth.com

www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.