


Built-in Valve


COIL Model **S4-CEI** – 26W – ED 100% for valves V3D-DT , V4D-CEI-2P , V4D-CEI-3P Series

- Coil protection: Polyamide resin with fiber glass for Heat insulation class F (155°C) [311°F].
- Solenoids “S4-CEI” (18 W) are designed for continuous duty ED100%.
- Ambient temperature range : -15°/+40°
- Inlet voltage fluctuations must not exceed +/- 10% of nominal voltage to obtain correct operations and long life coils
- Protection degree: see tables below

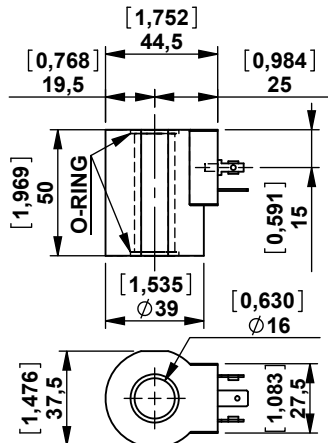


DIN 43650 - ISO 4400 IP65 with connector assembled

Code	Voltage	Heat Insulation class	Type	Material Number
OB	12 Volts D.C.	F (155°C) [311°F]	C166437OB1	R932000789
OC	24 Volts D.C.	F (155°C) [311°F]	C166437OC1	R932000790
OV	24 Volts RAC	F (155°C) [311°F]	C166437OV1	R932000791
OW	110 Volts RAC	F (155°C) [311°F]	C166437OW1	R932000792
OZ	220 Volts RAC	F (155°C) [311°F]	C166437OZ1	R932000793



AMP JUNIOR IP67


Code	Voltage	Heat Insulation class	Type	Material Number
OBA	12 Volts D.C.	F (155°C) [311°F]	C166471OB1	R932000835
OCA	24 Volts D.C.	F (155°C) [311°F]	C166471OC1	R932000836



SINGLE LEAD IP54

Code	Voltage	Heat Insulation class	Type	Material Number
OBL	12 Volts D.C.	F (155°C) [311°F]	C166453OB00600F	R932009107
OCL	24 Volts D.C.	F (155°C) [311°F]	C166453OC00600F	R932007009

Cable Length 600mm



DEUTSCH DT04-2P-V IP67

Code	Voltage	Heat Insulation class	Type	Material Number
OBD	12 Volts D.C.	F (155°C) [311°F]	C166461OB1	R932000818
OCD	24 Volts D.C.	F (155°C) [311°F]	C166461OC1	R932009108