

Rear eye MP9, Series CM1

- With rubber bushing
- Cylinder mounting in accordance with ISO 15552 ISO 21287
- Suitable piston Ø 32 40 63 100 25 50 80 mm



Standards
Weight

See table below
See table below

Technical data


Part No.	Piston Ø	Swivel bearing Ø	Standardization	Housing material	Weight	Fig.
3683203000	32 mm	10 mm	ISO 15552	Aluminum (forged)	0,092 kg	Fig. 2
3683204000	40 mm	12 mm	ISO 15552	Aluminum (forged)	0,143 kg	Fig. 1
3683206000	63 mm	16 mm	ISO 15552	Aluminum (forged)	0,411 kg	Fig. 1
3683210000	100 mm	20 mm	ISO 15552	Aluminum (forged)	0,956 kg	Fig. 1
3683202000	25 mm	10 mm	ISO 21287	Die-cast aluminum	0,063 kg	Fig. 1
3663205000	50 mm	12 mm	-	Aluminum (forged)	0,203 kg	Fig. 2
3663208000	80 mm	16 mm	-	Aluminum (forged)	0,619 kg	Fig. 2

Scope of delivery: clevis incl. mounting screws

Technical information

Material	
Material	Aluminum (forged) Die-cast aluminum
Bearing	Bronze

Dimensions

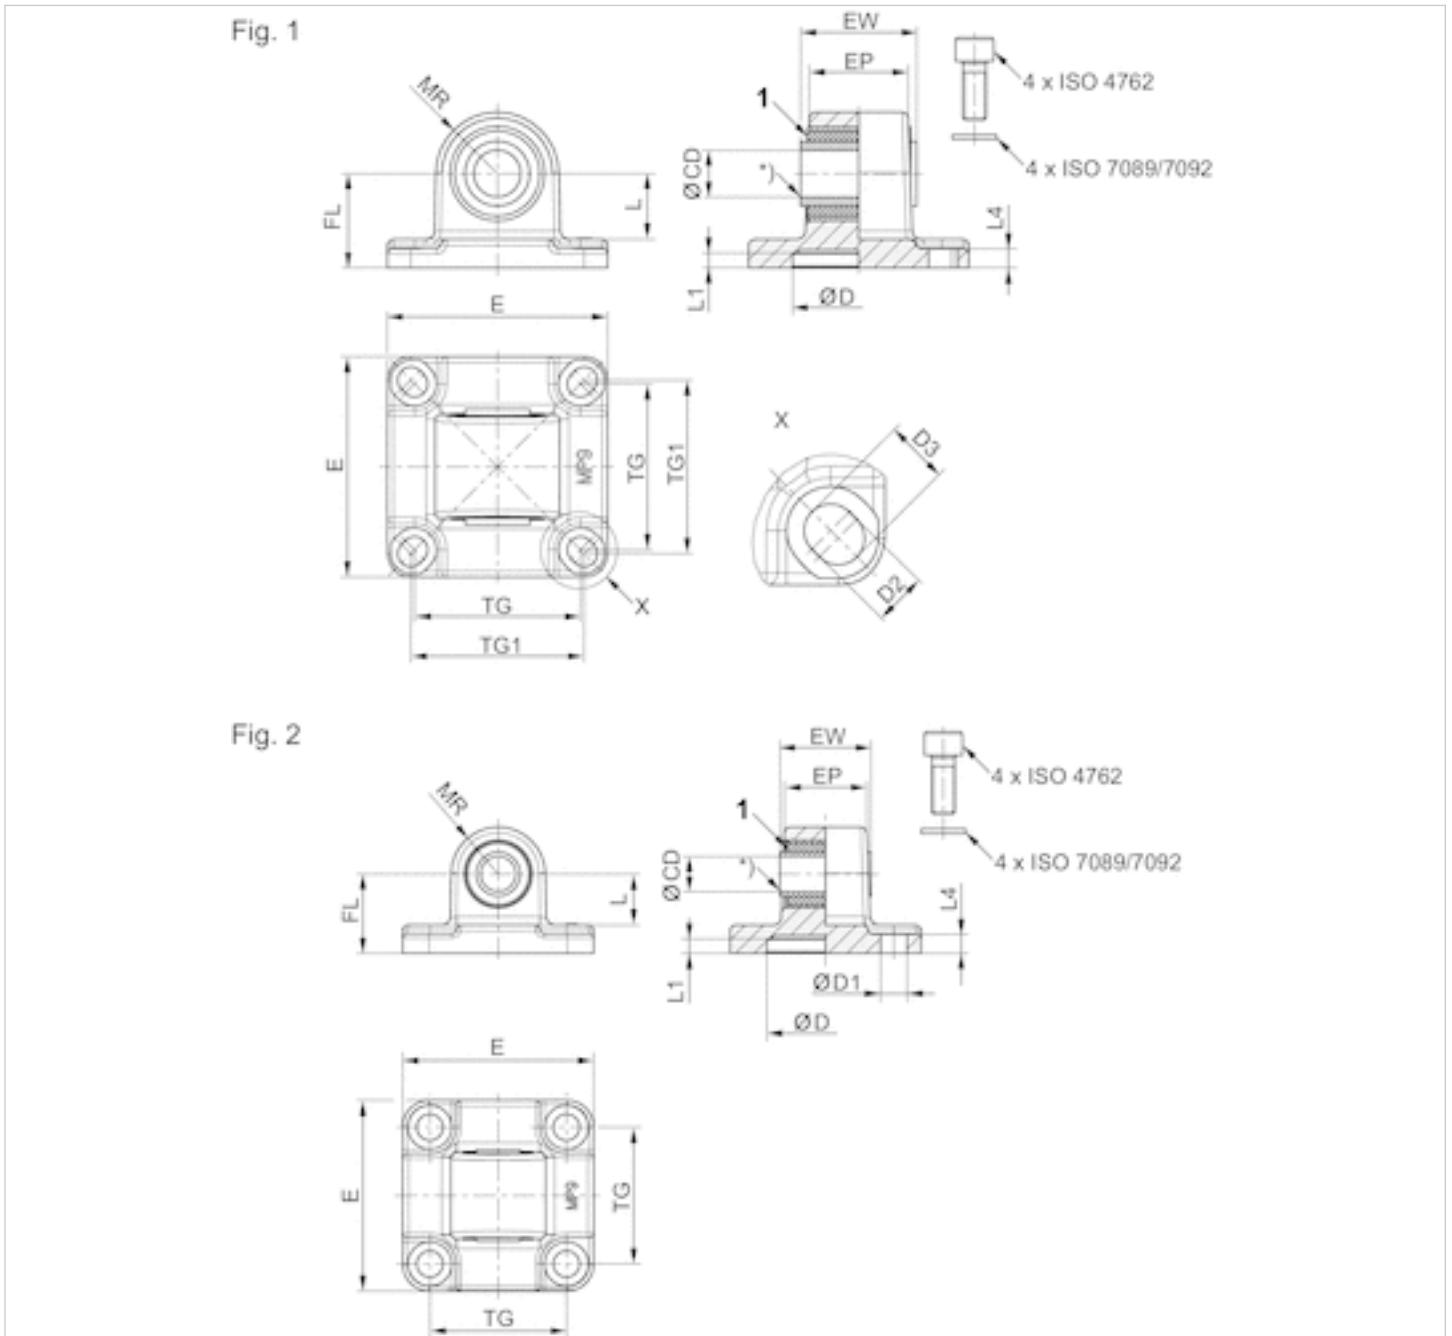

1) Rubber bushing

Dimensions

Part No.	Piston Ø	CD H11	CD H9	E	EW	EP	TG	TG1 ±0,2	FL ±0,2	L 1)	MR	L1	L4
3683203000	32 mm	10	-	46	25.5	18,9	32.5	-	22	13.8	12.5	5	5.5
3683204000	40 mm	-	12	53	27	23,5	38	40	25	16.3	15	5	5.5
3683206000	63 mm	-	16	75	39.5	33.5	56.5	59	32	22.3	21	5	6.5
3683210000	100 mm	-	20	114	59.5	54	89	90	41	25.8	25	5	10
3683202000	25 mm	10	-	40	17.5	14,5	26	27	20	14.8	12,5	3	3

D H11	D1 H13	D2 -0,2	D3 -0,2	Fig.
30	6.6	–	–	Fig. 2
35	–	6.6	8	Fig. 1
45	6.6	–	–	Fig. 1
55	–	11	11.7	Fig. 1
18	–	5,5	6,2	Fig. 1

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™